

ES-SERIES

MODEL: ES2350

KTV integrated amplifier KTV集成功放



特性:

- 紅外線遙控全部功能
- 設有開機和最大音量設置
- 6種音樂和麥克風模式可選
- 7段麥克風EQ調節
- 8組人聲效果預設模式及4組自定義模式、更多選擇
- 外接有源遙控器插座 LINE CONTROL
- USB接口連接PC輕鬆設置系統
- 三鍵音樂升降調選擇
- 高輸出350Wx2通道
- 超低信號輸出
- DSP效果處理
- FBK防嘯叫功能
- EXP激勵功能

Features:

- Full function infrared remote controlling
- Boot and maximum volume configuration
- 6 music and microphone mode is optional
- 7 paragraph microphone EQ adjustment
- 8 groups of vocal effect preset mode and custom mode, more choices
- Active external remote control socket LINE CONTROL
- USB interface to connect the PC to easily set the system
- Three key music lift tune select
- High output 350Wx2 channel
- Ultra-low signal output
- DSP effects processing
- FBK anti-whistle function
- EXP incentive function

描述:

ES2350是一款專業卡拉OK功率放大器，是專為卡拉OK系統而設計的合并式功率放大器。整體功能齊全，可以滿足所有的K歌系統的應用，全新的技術，整體音質和效果有明顯的提高，前置部分電路數字化設計，效果可儲存，對於純K系統更方便施工和調試。

Description:

ES2350 is a professional merge amplifier, specialized designs for Karaoke system. It is functional to meet all needs of Karaoke system's application. Band new technology, Overall sound quality and highly improved effects. Some circuits in front are digitally designed, effects can be saved, more convenience for installation and test of Karaoke system.

應用:

- KTV、夜總會擴聲系統

Applications:

- KTV,nightclub broadcasting

Specifications規格

System 系統

Output power(RMS) 輸出功率 350W+350W (8ohm)


Microphone 配置

Input sensitivity/Input resistance 輸入靈敏度/輸入阻抗 11MV/10K ohms
 Ten phase equalization 十段均衡器 ($\pm 0.5dB$ 調整adjusting) $\pm 12dB$
 Frequency response 頻率響應 57Hz, 125 Hz, 270 Hz, 450 Hz, 900 Hz, 1.8KHz, 2.7 KHz, 4 KHz, 6.3 KHz, 10 KHz
 HF increasing 高音提升 1 KHz/0dB; 20Hz/-1dB; 75 KHz/-1dB
 20 KHz/+6dB

Music 配置

Input sensitivity/Input resistance 輸入靈敏度/輸入阻抗 255MV/10K ohms
 Seven phase equalization 七段均衡器 ($\pm 0.5dB$ 調整adjusting) $\pm 10dB$
 57Hz, 134 Hz, 400 Hz, 1 KHz, 2.5 KHz, 6.3KHz, 16 KHz
 Digital adjusting class 數字變調級數 ± 5 級
 THD 總諧波失真 $\leq 0.05\%$
 Frequency response 頻率響應 20Hz-70 KHz/-1dB
 Subwoofer Frequency response 重低音頻率響應 20Hz-200Hz/-1dB
 SPEC 規格 3U
 Dimensions 尺寸 HxWxD 122 mm x 482 mm x 390 mm
 Net Weight 重量 13 kg

Overall dimensions

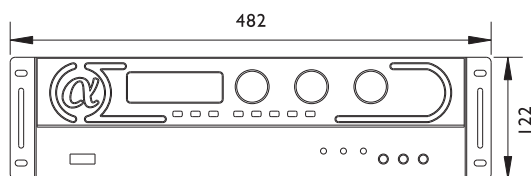

Front

