



### 描述:

MS2801是一款超低頻揚聲器，採用薄型倒相式設計。裝載2x18"大功率長衝程低頻驅動單元，低頻承受功率大，靈敏度高，頻率延伸低，適合作為電影院低頻擴展固定安裝使用，頻率響應特性38Hz~200Hz。MS2801使用18mm高密度板制造箱體、環保塗層保護外殼，接線板裝有阻隔式連接座。箱體底部的4個橡膠墊可防止音箱滑動。

### Description:

MS2801 is a subwoofer system. Thin and phase inverted design. Loaded with 2x18" high power long stroke LF driver, LF can stands high power. High sensitivity, low frequency extend, suitable for LF extending permanent installation use, frequency range 38hz~200hz. Ms2801 is made by 18mm high density wood, environmental paint for protect, blocking style wire port. The 4 rubber feet on the bottom can prevent the speaker from slipping.

### 特性:

- 2x18"超低頻系統
- 薄型箱體設計
- 長衝程驅動器設計
- 動態大、失真低
- 承受功率大，靈敏度高
- 頻率延伸低
- 符合THX標準

### 應用:

- 中小型電影院、影廳
- 後期制作設備
- 私人定制影院

### Features:

- 2x18" subwoofer system
- Slim cabinet design
- Long stroke driver
- Big dynamic, low distortion
- High power, high sensitivity
- Low frequency extend
- According with THX standard

### Applications:

- Middle small size cinema
- Post production
- Private cinema

## Specifications規格

### System 系統

Frequency Range 頻響	38 Hz - 200 Hz @ (± 3 dB)
Sensitivity 系統靈敏度	107 dB SPL (1W @ 1m)
Nominal Impedance 阻抗	4 ohms
Power Handling 功率	1200 watts (rms額定), 2400 watts (program節目), 4800 watts (peak最大)
Maximum SPL 最大聲壓	134 dB
Crossover Frequency 分頻點	80 Hz


### DRIVERS 驅動器

Low Frequency 低頻	2 x 18(in) 460 mm dia (直徑), 100 mm(4in) voice coil dia (音圈直徑)
------------------	---

### PHYSICAL 箱體

Enclosure Construction 箱體	18 mm Medium Density Fiberboard (中纖板)
Finish 表面	Wear-resistant textured black paint (黑色耐磨粗點噴漆)
Input Connectors 連接器	terminal barrier strip (端口脫綫連接)
Dimensions 尺寸 H x W x D	670 mm x 1250 mm x 430 mm
Net Weight 重量	59 kg

## Overall dimensions

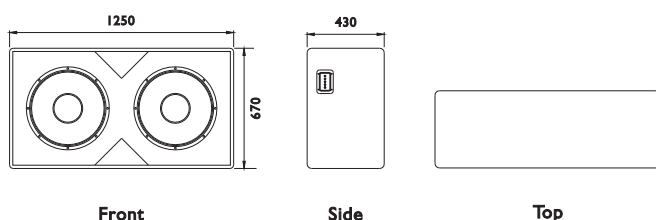

Front

Side

Top